


FEATURES:

- Anti-Static Devices For Ball- Stem- Body
- Blow-out Proof Stem
- Pressure Balance Hole in Ball Slot
- Built in ISO 5211 Bracket Mount for Easy Automation

STANDARDS:

- Design: ASME B16.34
- Wall Thickness: ASME B16.34
- Fire Safe: API 607 ISO 10497
- Face to Face: ASME B 16.10
- End Flange: ASME B16.5
- Inspection & Testing: API 598

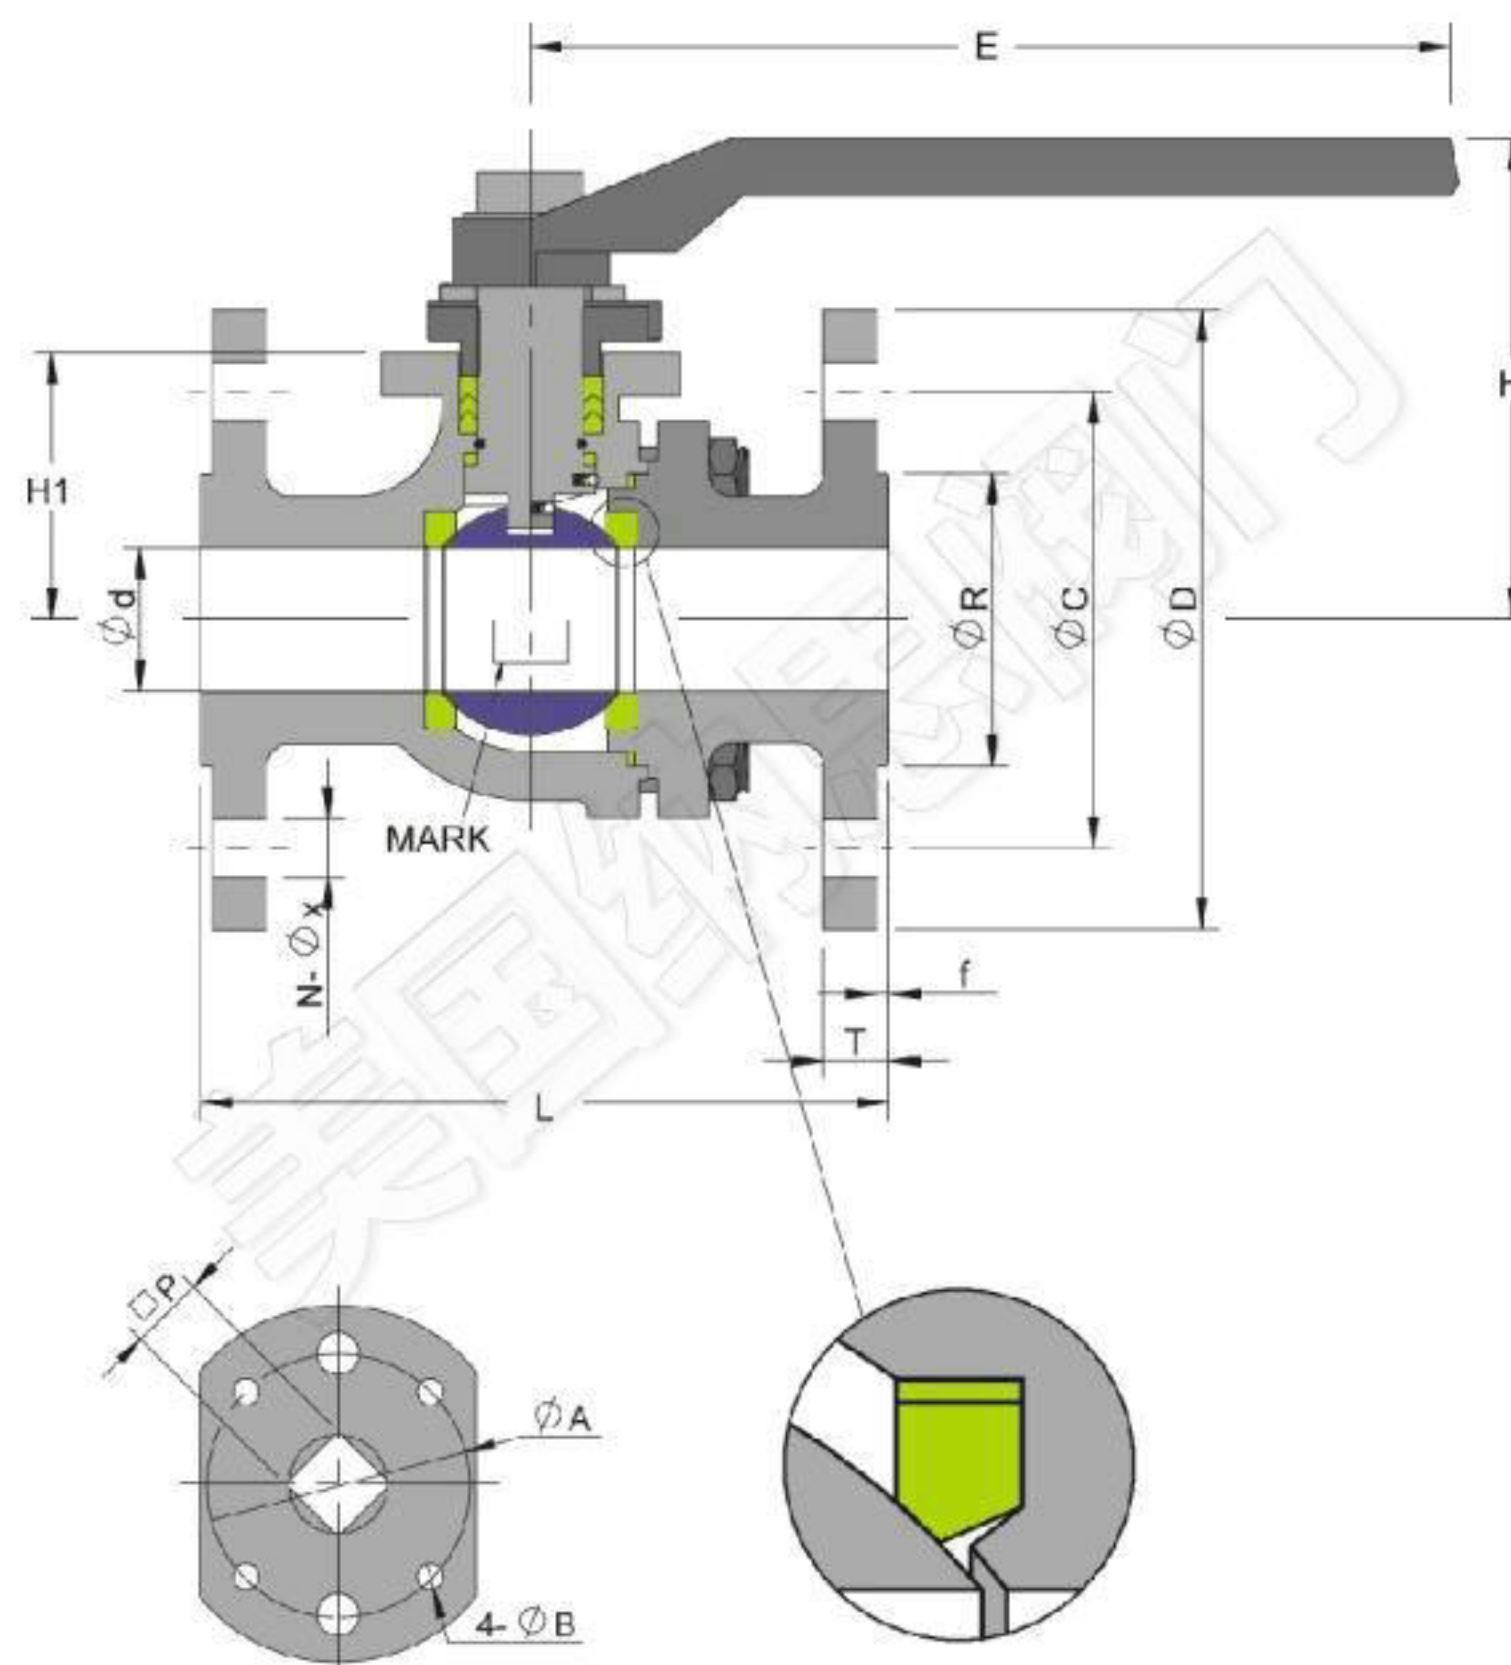

ISO-5211 Mounting Pad

Fire Safe Design

Unit:mm ■ ASME 300LBS

Size	(LBS)	L	Ød	ØR	ØC	ØD	H	H1	E	f	T	N	ØX	□P	ØA	ØB	ISO-5211
1/2"	300	140	15	34.9	66.7	95	77.5	34	150	2	14.3	4	16	11	42	4	F4
3/4"	300	152	20	42.9	82.6	115	79	35.5	150	2	15.9	4	19	11	42	4	F4
1"	300	165	25	90.8	88.9	125	88	45	150	2	17.5	4	19	11	50	4	F4
1-1/4"	300	178	32	63.5	98.4	135	100	50	170	2	19.1	4	19	14	50	5	F5
1-1/2"	300	190	38	73	114.3	155	122	60	230	2	20.7	4	22.3	17	70	6.5	F7
2"	300	216	50	92.1	127	165	130	68	230	2	22.3	8	19	17	70	6.5	F7
2-1/2"	300	241	65	104.8	149.2	190	148	86	230	2	25.4	8	22.3	17	70	6.5	F7
3"	300	282	78	127	168.3	210	167	96	400	2	28.6	8	22.3	22	102	8.5	F10
4"	300	305	100	157.2	200	255	188	117	400	2	31.8	8	22.3	22	102	8.5	F10
5"	300	400	125	185.7	235	280	246	141	645	2	35	8	22.3	22	125	10.5	F12
6"	300	403	150	215.9	269.9	320	288	172	845	2	36.6	12	22.3	27	125	10.5	F12
8"	300	502	200	269.9	330.2	380	329	213	1335	2	41.3	12	25.4	36	140	14	F14
10"	300	568	250	323.8	387.4	445	396	255	1500	2	47.7	16	28.5	36	140	14	F14