


Flanged Ball Valves

FEATURES:

- Anti-Static Devices For Ball- Stem- Body
- Blow-out Proof Stem
- Pressure Balance Hole In Ball Slot
- Built In ISO 5211 Bracket Mount For Easy Automation

STANDARDS:

- Design: DIN 3357 EN 12516-1
- Wall Thickness: ASME B16.34 EN 12516-1
- Fire Safe: API 607 ISO 10497
- Face to Face: DIN 3202
- End Flange: DIN EN 1092-1
- Inspection & Testing: DIN 3230 EN 12266

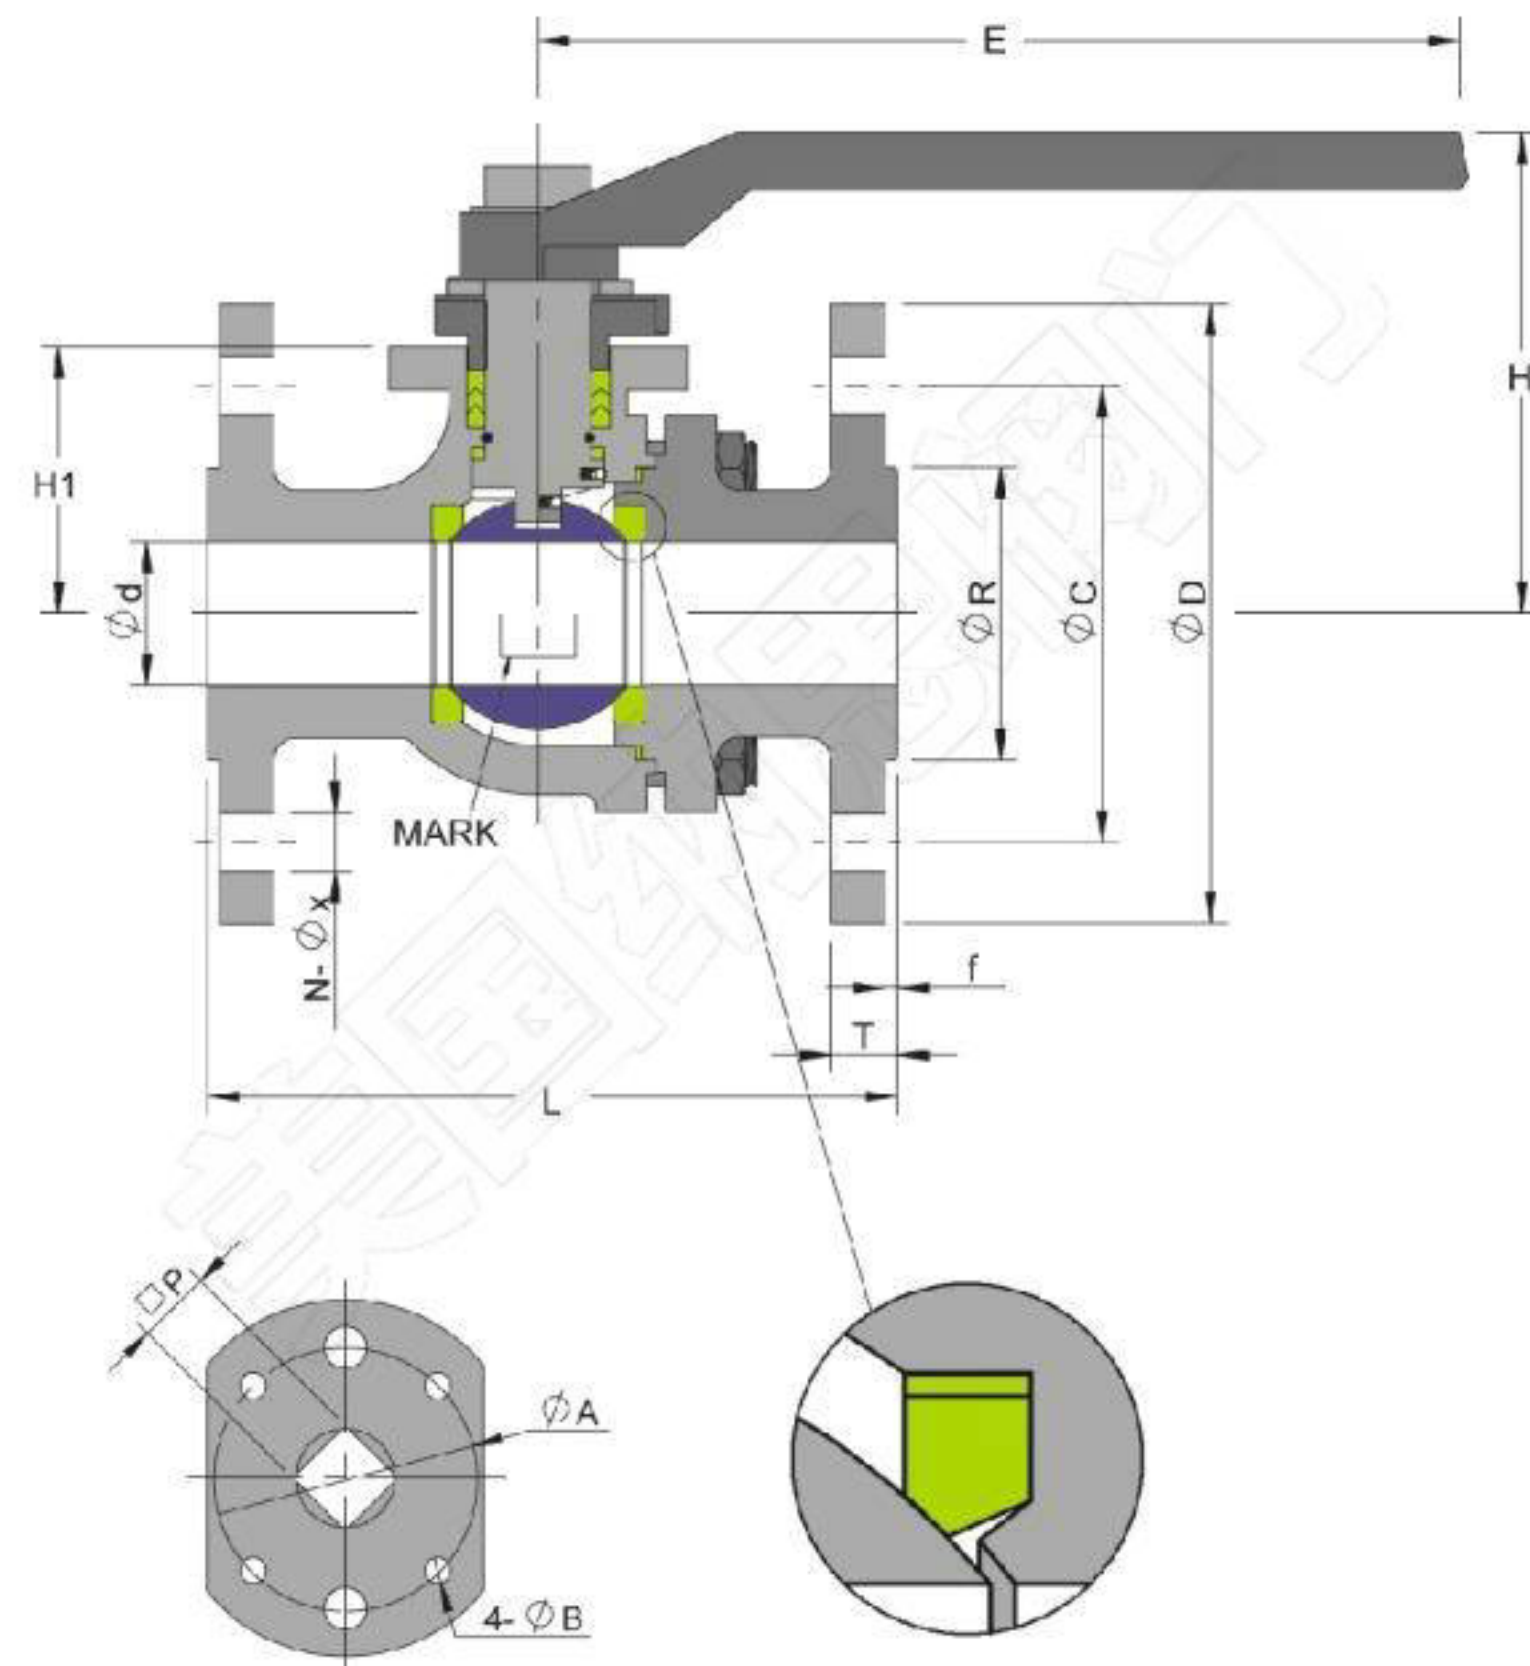

ISO-5211 Mounting Pad

Fire Safe Design

Unit:mm ■ DIN PN16

Size	Pressure	L	Ød	ØR	ØC	ØD	H	H1	E	f	T	N	ØX	□P	ØA	ØB	ISO-5211
1/2"	PN16	115	15	45	65	95	77.5	34	150	2	14	4	14	11	42	4	F4
3/4"	PN16	120	20	58	75	105	79	35.5	150	2	16	4	14	11	42	4	F4
1"	PN16	125	25	68	85	115	88	45	150	2	16	4	14	11	42	4	F4
1-1/4"	PN16	130	32	78	100	140	100	50	170	2	16	4	18	14	50	5	F5
1-1/2"	PN16	140	38	88	110	150	122	60	230	3	16	4	18	17	70	6.5	F7
2"	PN16	150	50	102	125	165	130	68	230	3	18	4	18	17	70	6.5	F7
2-1/2"	PN16	170	65	122	145	185	148	86	230	3	18	4	18	17	70	6.5	F10
3"	PN16	180	78	138	160	200	167	96	305	3	20	8	18	22	102	8.5	F10
4"	PN16	190	100	158	180	220	188	117	305	3	20	8	18	22	102	8.5	F10
5"	PN16	325	125	188	210	250	246	141	500	3	22	8	18	22	125	10.5	F12
6"	PN16	350	150	212	240	285	288	172	645	3	22	8	22	27	125	10.5	F12
8"	PN16	400	200	268	295	340	329	213	845	3	24	12	22	27	125	10.5	F12
10"	PN16	450	250	320	355	405	396	255	1335	3	26	12	26	36	140	14	F14