

NARSF001

1PC内螺纹球阀
1PC Ball Valve 1000WOG

Threaded Ball Valves



产品特点 / FEATURES:

阀杆带有防脱出装置设计 Blow-out Proof Stem
减流量 Reduced Port
钢球球槽上有泄压孔设计 Pressure Balance Hole In Ball Slot
多种螺纹端供选择 Various Thread Standards Available
可选择挂锁装置 Lock Device

标准 / STANDARDS:

设计标准 / Design: ASME B16.34
壁厚标准 / Wall Thickness: ASME B16.34
螺纹标准 / Pipe Thread: ASME B1.20.1, BS21
DIN 2999/259, ISO 228/1
JIS B 0203, ISO 7/1
检测标准 / Inspection & Testing: MSS SP-110, EN 12266

No.	PARTS NAME	MATERIAL		
1	阀体/Body	CF8M	CF8	WCB
2	阀杆/Stem	SUS316	SUS304	
3	弹簧垫圈/Spring Washer		SUS304	
4	止推垫片/Thrust Washer		PTFE	
5	填料压盖/Packing Gland		PTFE	
6	填料压套/Washer		PTFE	
7	球体/Ball	CF8M	CF8	
8	阀座/Seat		PTFE	
9	端塞(堵头)/End Plug	CF8M	CF8	WCB
10	手柄套/Handle Cover		Plastic	
11	锁片/Locking Device		SUS301	
12	手柄/Handle		Plastic	
13	螺母/Nut		SUS301	

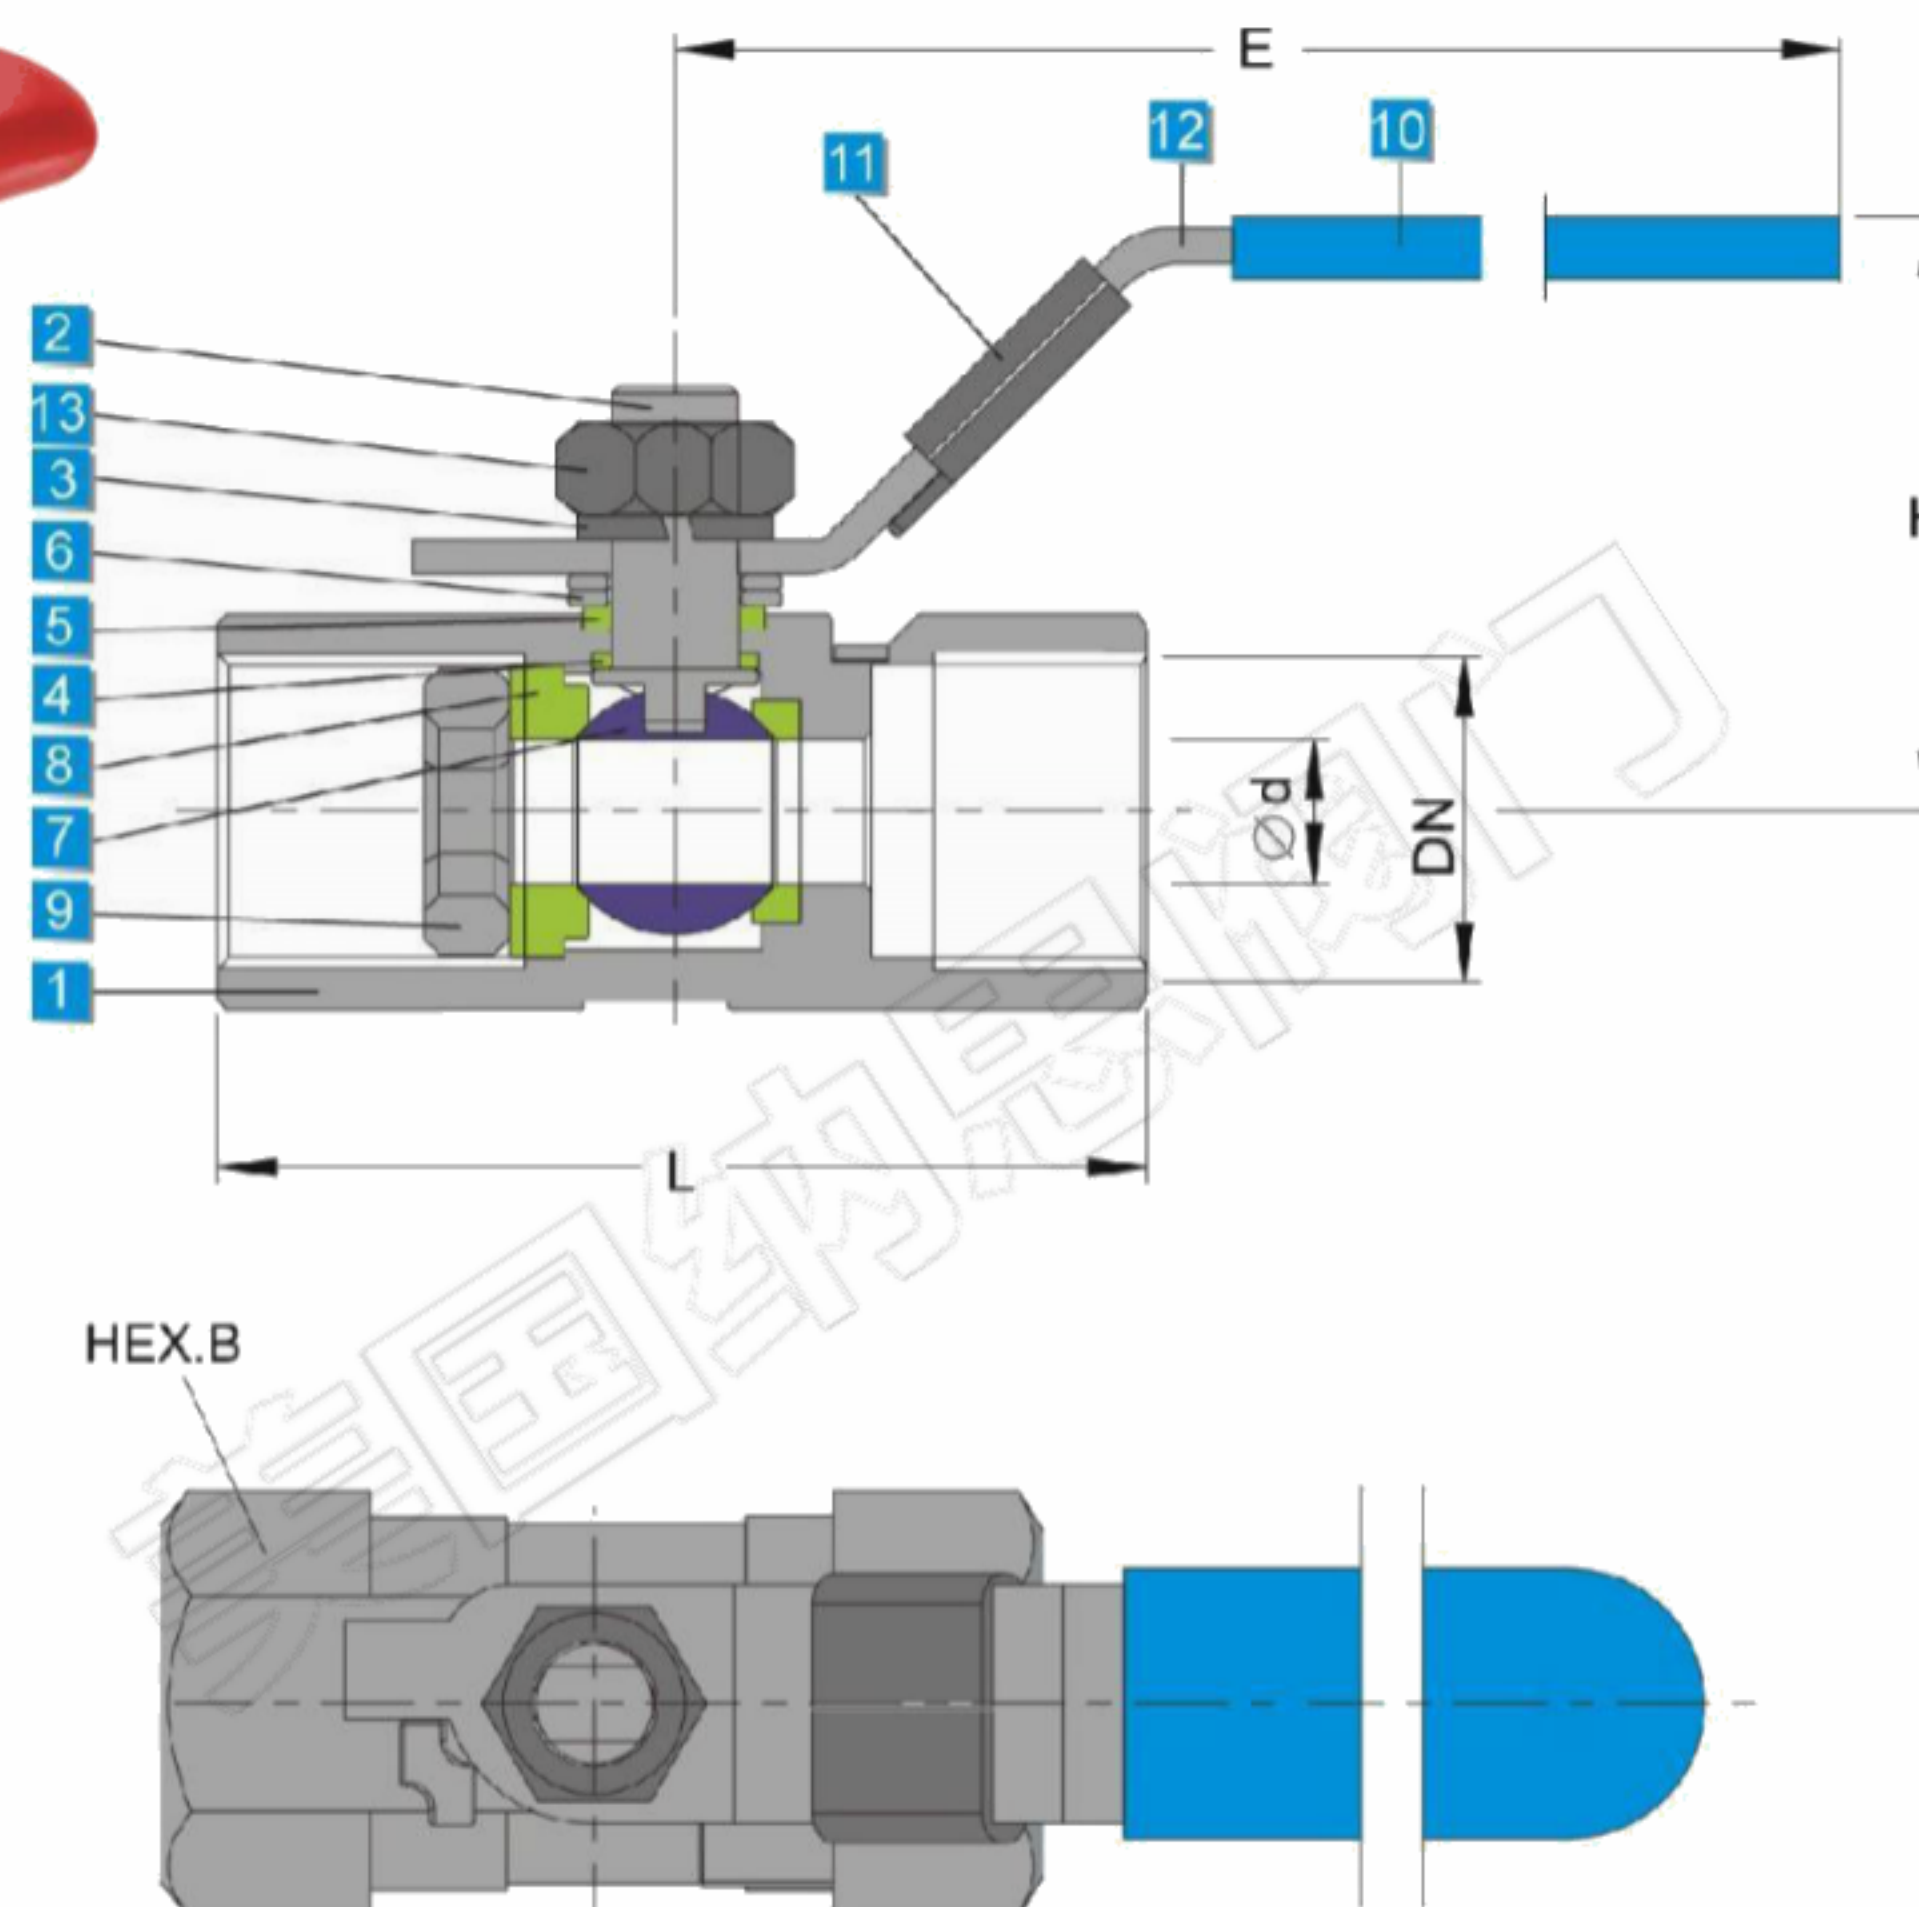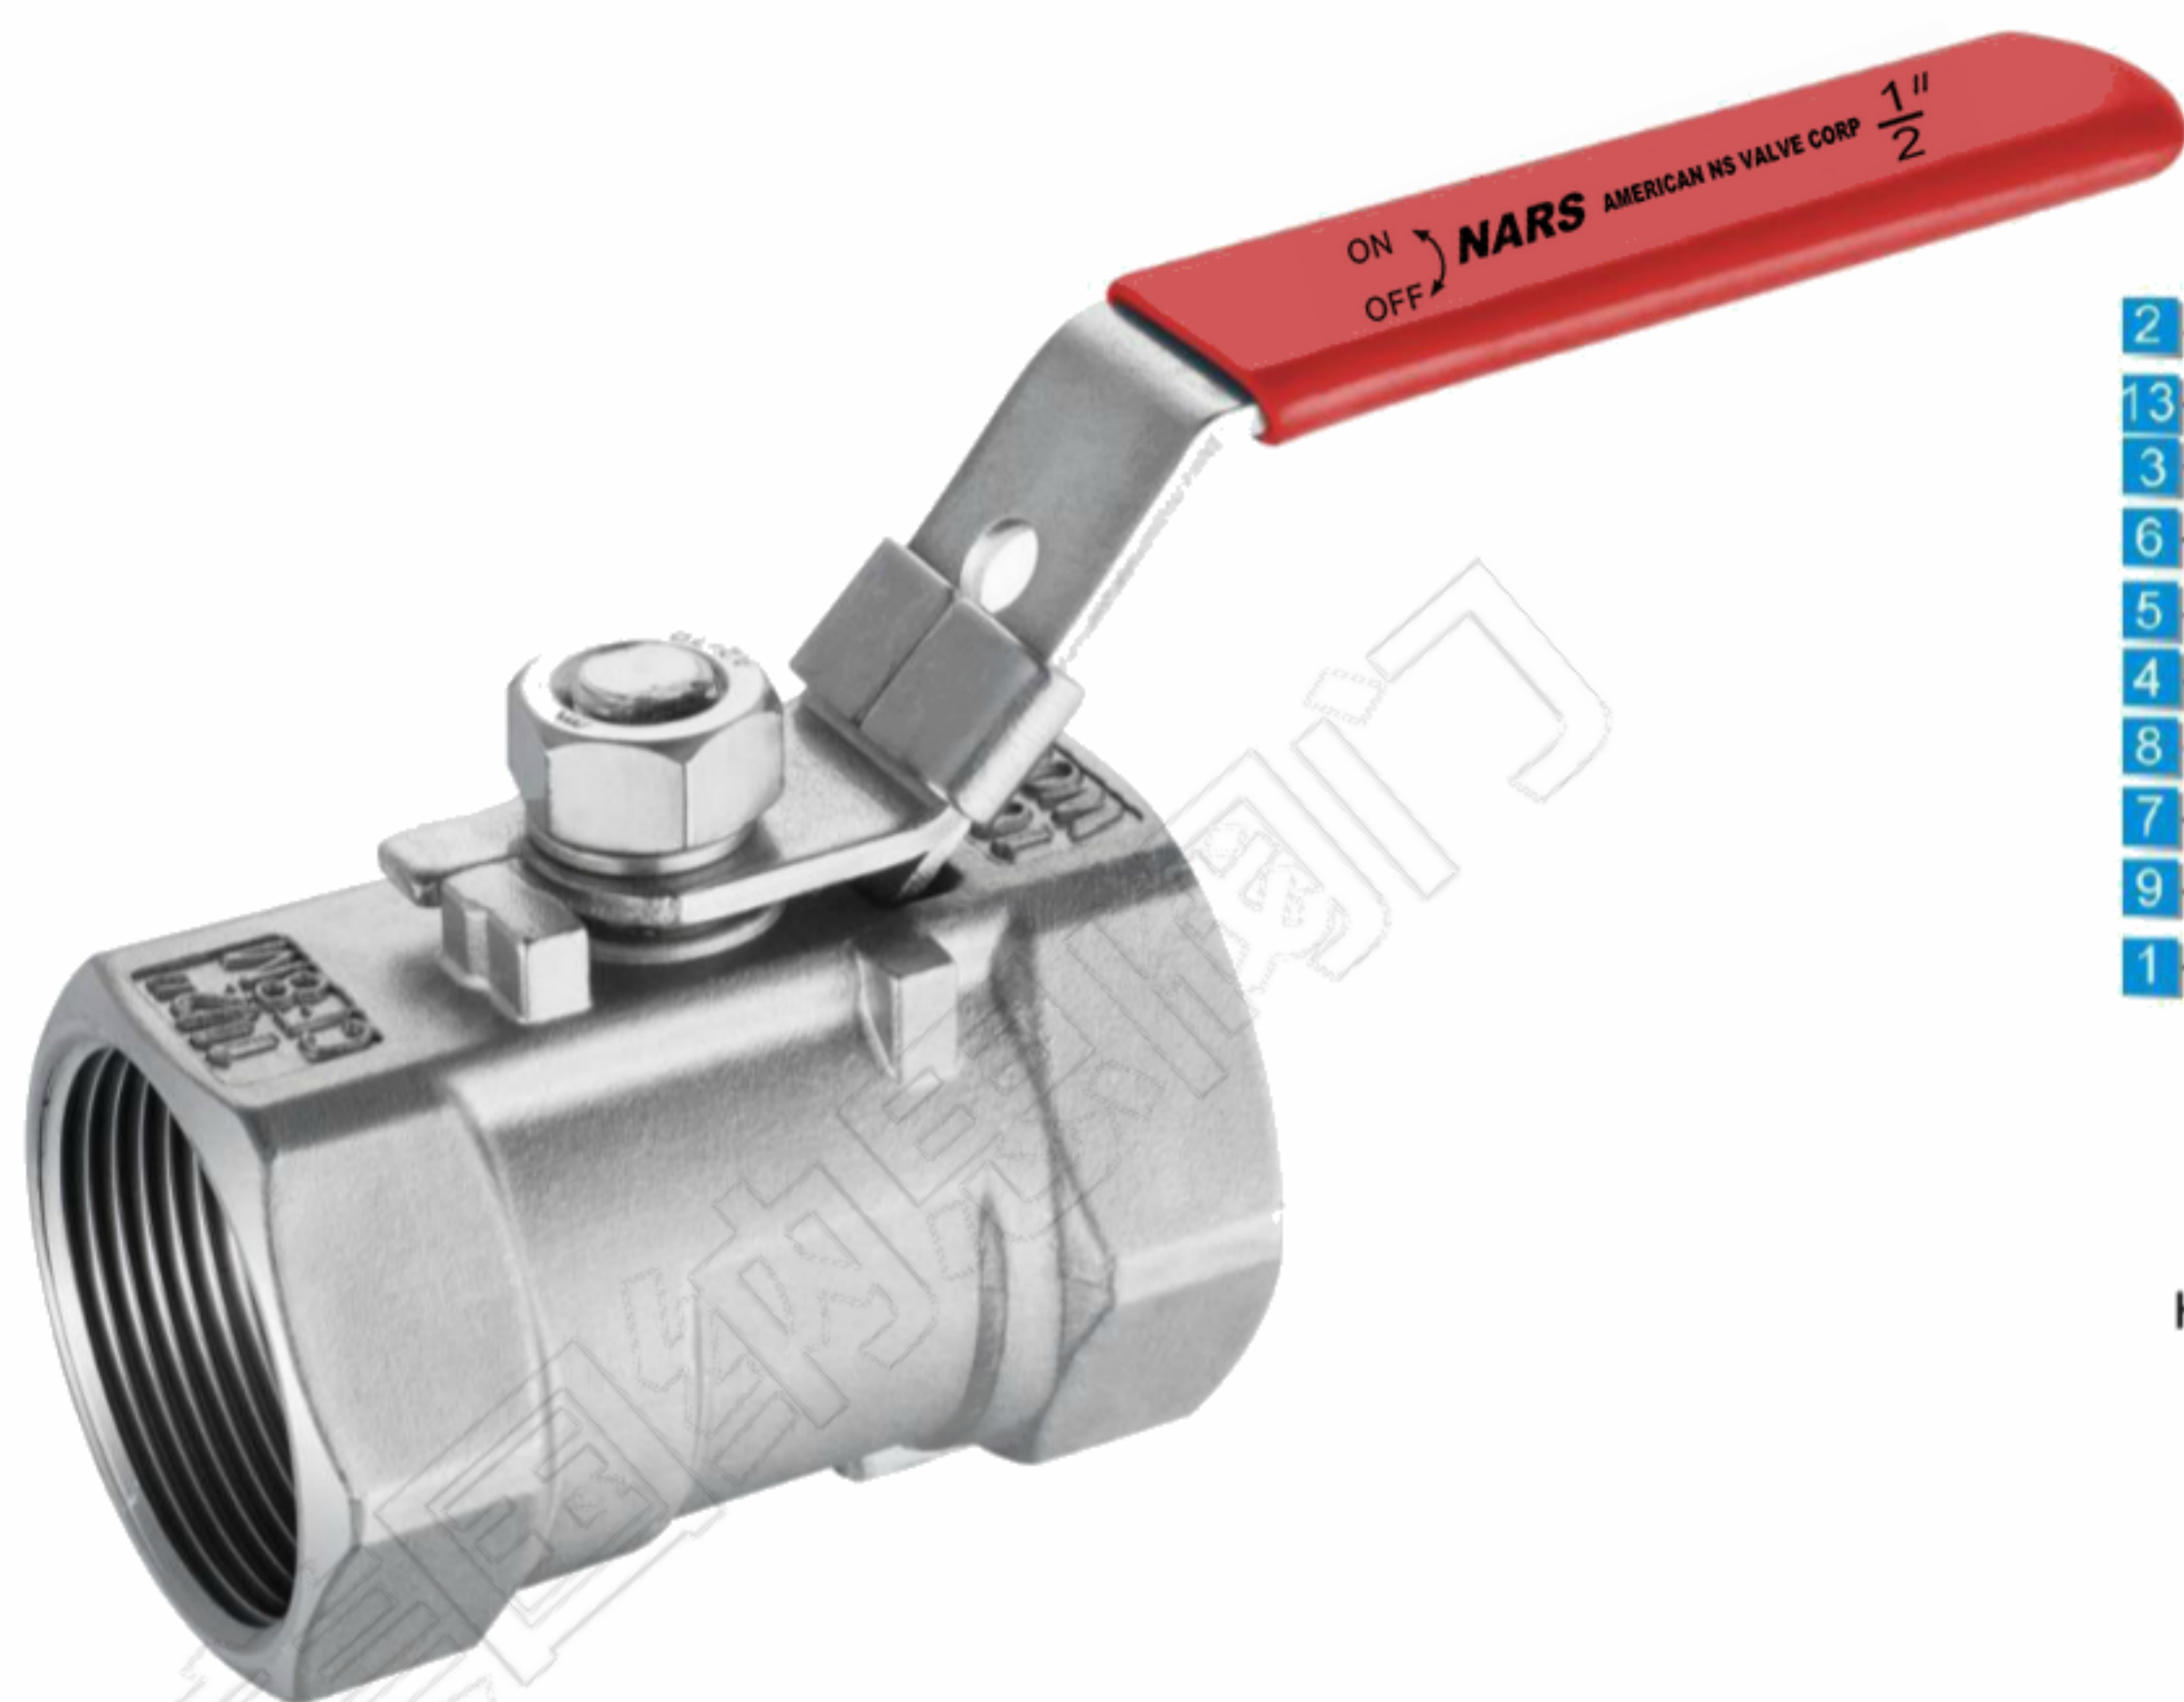

Unit:mm

DN	Ød	L	H	E	HEX.B	End Thread
1/4"	5	39	31	70	17	NPT, MPT, BSPT, BSP, DIN, PT, etc.
3/8"	7	44	36	80	21	
1/2"	9	59	42	95	25	
3/4"	12.5	60	45	95	32	
1"	15	72	54	110	38	
1-1/4"	20	77	59	110	48	
1-1/2"	25	84	63.5	150	53	
2"	32	100	70	150	66	
2-1/2"	38	120	95	200	82	
3"	48	142	103	200	96	